


STRIP BONDED GEOGRIDS WITH HIGH-TENACITY POLYESTER CORE

PARALINK 200 300 400 500 600 700 800 900 1000 1100 1200 1300 1600

Mechanical properties		200	300	400	500	600	700	800	900	1000	1100	1200	1300	1600	
UTS - Longitudinal *	kN/m	206	309	412	515	612	721	826	927	1038	1133	1236	1339	1648	
Tolerance *		-5	-8	-10	-13	-9	-17	-22	-22	-25	-27	-30	-32	-40	
Single strip longitudinal tensile strength	kN	36	54	72	90	108	126	120	112.5	126	110	120	130	160	
Strain at T _{ch} - Longitudinal*	%	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	
Physical properties (typical values)															
Polymer of the reinforcement strip element		PET	PET	PET	PET	PET	PET	PET	PET	PET	PET	PET	PET	PET	PET
Polymer coating of the strips		PE	PE	PE	PE	PE	PE	PE	PE	PE	PE	PE	PE	PE	PE
Thickness of the reinforcement strips	mm	1.4	1.8	2.4	3.0	3.8	4.2	3.8	3.8	4.2	3.8	3.8	4.3	4.5	
Single strip width	mm	85	88	90	90	90	91	91	91	91	91	91	91	91	
Pitch (weft x warp)	cm	100x18	100x18	100x18	100x18	100x18	100x18	100x15	100x12.5	100x12.5	100x10	100x10	100x10	100x10	
Roll length	m	200	200	150	130	100	100	100	100	100	50	50	50	50	
Roll width	m	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	

ParaLink geogrids are planar structure consisting of a monoaxial array of composite geosynthetic strips. Each single longitudinal strip has a core of high tenacity polyester yarns tendons encased in a polyethylene sheath; the single strips are connected by cross-laid polyethylene strips to form a grid configuration to the composite. The geocomposite is CE certified for reinforcement applications and approved by the BBA to comply with the design done according to the BS8006.

* Short-term tests in accordance with EN ISO 10319:2008. The values given are mean values of ultimate strength tolerance values corresponding to the 95% confidence level to establish the characteristic short-term tensile strength in accordance with EN 13251:2001 (T_{ch}). Intermediate grades are available on request.

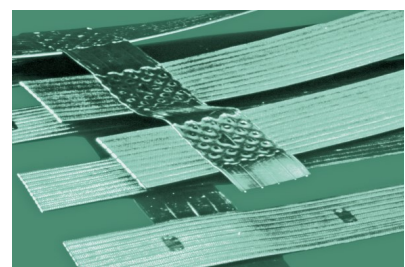

For the optimisation and improvement process of the technical characteristics of the products, the producer reserves the right to modify standards and characteristics of the product without warning. The information contained herein is to the best of our knowledge accurate, but since the circumstances and conditions in which it may be used are beyond our control, we do not accept any liability for any loss or damage, however arising, which results directly or indirectly from the use of such information nor do we offer any warranty or immunity against patent infringement. Specifiers are requested to check the validity of the specification they are using.

© 2015 Maccaferri. All rights reserved. Maccaferri will enforce Copyright.

Paralink® is a registered trademark of Linear Composite Ltd.